

NOTES


1. Dimensions in meters, unless otherwise stated.
2. This drawing should be read in conjunction with other relevant engineering details, drawings & specifications.
3. Any discrepancies should be reported to the design engineer immediately, so that clarification can be sought prior to the commencement of works.
4. The dimensions must be rectified on site before construction.
5. All works are to be in accordance with Southwark borough council specification and standards.

KEY

- F-B1-PC(63)**  
Pre-cast concrete flag on existing footway, pimple finish, grey, 600x600x63. Area: 95m<sup>2</sup>. For Detail see CD1 on drawing no.LBS/MW/SOUTHWARK\_PARK\_RD/900-1100-01
- F-B1-PC(63)**  
Pre-cast concrete flag on new buildout, pimple finish, grey, 600x600x63. Area: 40m<sup>2</sup>. For Detail see CD1 on drawing no.LBS/MW/SOUTHWARK\_PARK\_RD/900-1100-01
- 6mm AGGREGATE ASPHALT**  
40mm deep (varies in places) 6mm aggregate asphalt at tree pit locations. Area: 17m<sup>2</sup>. For Detail see CD4on dwg. no.LBS/MW/SOUTHWARK\_PARK\_RD/900-1100-02
- T(B)-PC(65)**  
Blister tactile stone slab, red as shown, 400x400x65. Area: 10m<sup>2</sup>. For Detail see CD2 on drawing no.LBS/MW/SOUTHWARK\_PARK\_RD/900-1100-01
- K15-T1(N/S)**  
Re-laid granite kerb, 150x300mm. (Length: 50m). For Detail see CD3 on drawing no.LBS/MW/SOUTHWARK\_PARK\_RD/900-1100-01
- 50x150mm CONCRETE EDGING**  
Precast concrete edging surrounding resin bound buildouts. Length: 20m. For Detail see CD8 on dwg. no.LBS/MW/SOUTHWARK\_PARK\_RD/900-1100-03
- 300mm ASP laid as channel**  
300 mm wide artificial stone paving laid as channel (19m length). For Detail see CD5 on drawing no.LBS/MW/SOUTHWARK\_PARK\_RD/900-1100-02
- PROPOSED ROAD MARKING**  
Proposed/Refreshed road markings
- PROPOSED CARRIAGEWAY GULLY**  
New Cycle friendly Pot Gully (2no.). For Detail see DD1 on drawing no.LBS/MW/SOUTHWARK\_PARK\_ROAD/500-02
- PROPOSED FOOTWAY GULLY**  
Cycle friendly Pot gully  
Quantity: 1no.
- PROPOSED MANHOLE COVER**  
New manhole cover over redundant gully. Quantity: 1no.
- RELOCATED BIN**  
Relocated Bin. Quantity: 1no.
- PROPOSED BELISHA BEACON**  
New Belisha beacons with LED spotlight. Quantity: 2no. For Details on this and ducting/feeder pillar see LBS-SD-1200-002D
- PROPOSED MANCHESTER BOLLARD**  
Manchester bollard with reflective banding. Quantity: 1no.
- PROPOSED KEEP RIGHT BOLLARD**  
Retro-reflective bollard with Keep Right sign face. Quantity: 1 no.

S:\TRANSPORT PROJECTS\MINOR WORKS\CIL FUNDED SCHEMES\22 SOUTHWARK PARK ROAD - MORETON HOUSE\PROJECT DETAILS\22 SOUTHWARK PARK RD - GA REV C.DWG

LOCATION PLAN

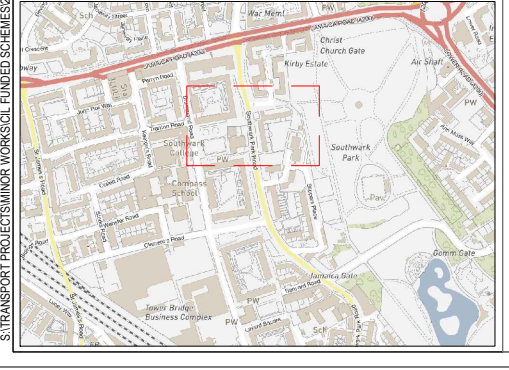

REV	DATE	REVISION DESCRIPTION / DETAILS	DRN BY	CHKD BY	APPRVD BY
C	30.08.23	AMENDED WITH UPDATED TOPO SURVEY	BR	--	--
B	02.05.23	AMENDED FOLLOWING RSA	BR	GM	RW
A	22.11.22	OUTLINE DESIGN	BR	GM	RW



PROJECT:  
**MINOR WORKS  
CIL FUNDED SCHEMES  
SOUTHWARK PARK ROAD - ZEBRA CROSSING**

TITLE:  
**GENERAL ARRANGEMENT**

STATUS:	OD	DRAWN	BR
SCALE:	1:200 @ A3	DESIGNED	BR
DRAWING NO:	LBS/MW/SOUTHWARK_PARK_RD-GA-01	CHECKED	GM
DATE DRAWN:	22 NOV 2022	APPROVED	RW
DATE ISSUED:	22 NOV 2022	REV:	C